



P\N	MATERIAL	MATERIAL DESCRIPTION	FINISH	REMARKS
	416 SSTL	.250 DIA STOCK		

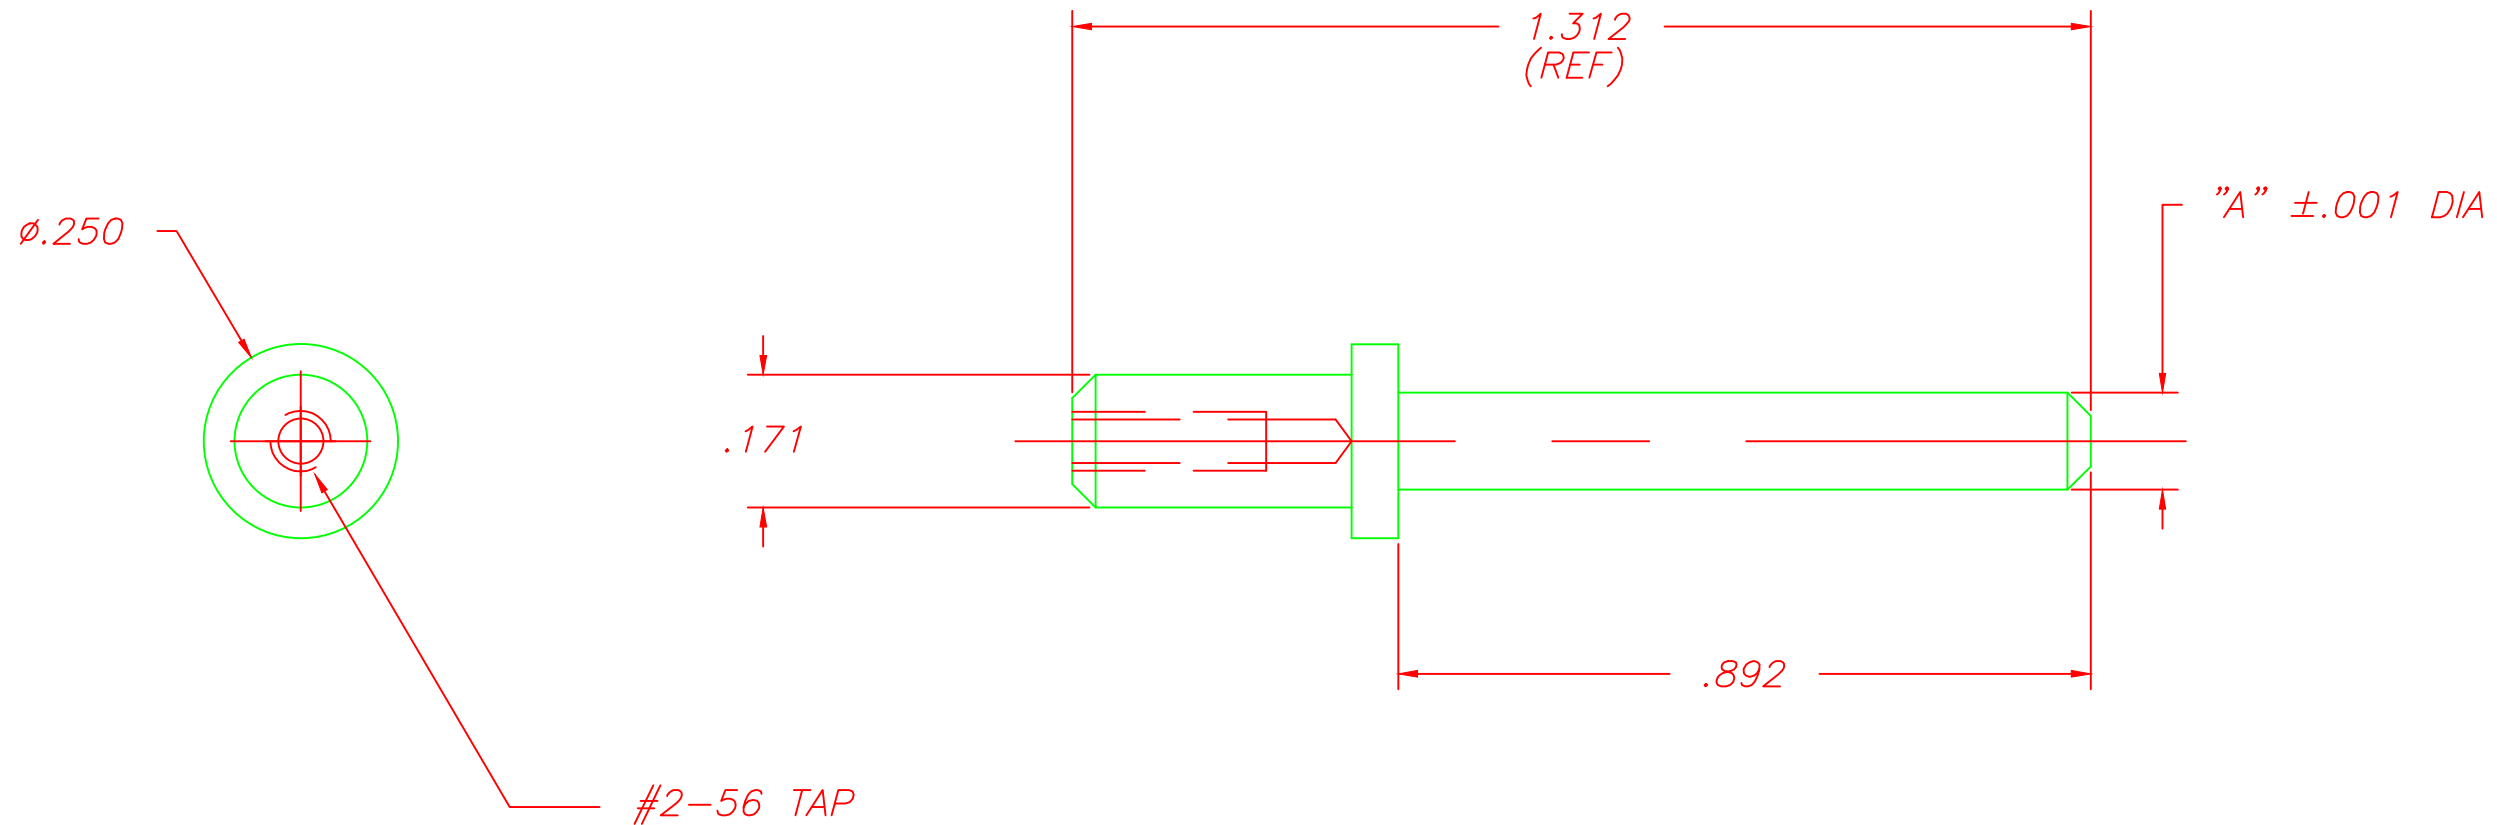

P/N	"A" DIA.	AVAILABILITY
-01	.122	STOCK
-02	.137	STOCK
-03	.155	STOCK
-04	.177	AVAILABLE UPON REQUEST
-05	.183	STOCK
-06	.215	AVAILABLE UPON REQUEST
-07	.230	AVAILABLE UPON REQUEST
-08	.250	STOCK

SEMCO PROPRIETARY

CAD ADMINISTERED
CHANGES ONLY



AutoCAD

x	ASM No.	A	FIRST ISSUE	BY	DATE	APVD
QTY	ASSEMBLY NUMBER	ECN	REV.	REVISION		BY DATE APVD
TOLERANCES UNLESS OTHERWISE SPECIFIED.			APPROVALS	DATE		
INCHES		ANGULAR	DESIGNED			
.X ± .02		±1°	M. NACCI	12-27-01		
.XX ± .01			DRAWN			
.XXX ± .005			M. NACCI	12-27-01		
FRACTIONAL = STOCK SIZE			CHECKED			
DE-BURR ALL EDGES .020 MAX.			RELEASED			
			M. NACCI	12-27-01		
This drawing is the property of SEMCO CORPORATION. It is loaned with the understanding that it may not be reproduced nor may the information contained herein be used for the making of drawings or for manufacturing purposes without the written consent of SEMCO.				SCALE	DWG NO	SHEET
				4:1	SM200-3173-XX	1 OF 1
				REV. D		



SEMCO MACHINE CORPORATION
5 Kenneth Miner Drive
Wrentham, MA. 02093
(508) 384-8303

PIN, TOOLING 1.312 LONG